


Radio Energie RE.0110 and RE.0122 Tachogenerators

Technical Diagram

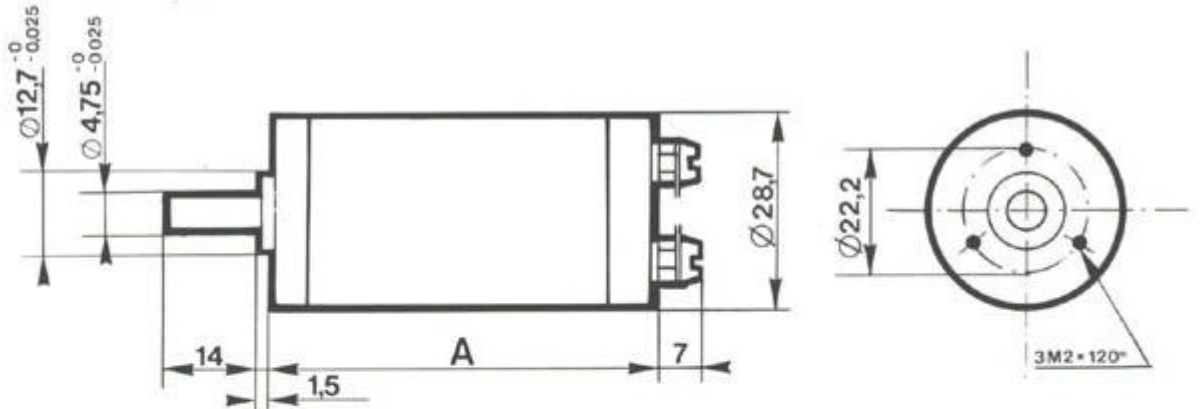

TYPE	RE.O110	RE.O122
A mm	46	58
MASSE WEIGHT GEWICHT kg	0,10	0,15

Electrical Options

				Min.						Max.
E.M.F at 1000rpm	E _n	V	RE0110	2	3	5	7			
			RE0122					8	10	15
Voltage gradient	C _v	V/tr/min V/rpm V/U/min	RE0110	0,002	0,003	0,005	0,007			
			RE0122					0,008	0,010	0,015
Armature resistance	R _a	impedance	RE0110	50	80	215	460			
			RE0122					185	290	670
Max. thermal load	I _{th}	A	RE0110	0,05	0,05	0,03	0,02			
			RE0122					0,04	0,03	0,02
Max. allowed speed	n _a	tr/min rpm U/min	RE0110	12000	12000	12000	12000			
			RE0122					12000	10000	6500



ASKA

ul. Wędkarska 2A/B1, 04-869 Warszawa

tel. 22 4985908/9, fax 22 6177020

e-mail: ask@aska.com.pl www.kodykreskowe.com