



Mobile Printers

MX20

With MX20 on hand, label printing becomes so simple between your fingertips.

MX20 is powered by high capacity lithium-ion battery, armored with water/dust/shock resistant feature, supported with drop-and-fit design; it is your ultimate weapon to take on the challenges from mobile applications in retail / warehouse & storage / parking receipt industry and many more.



- Drop & Fit label installation design.
- Long standby time up to 72 hours or 300 label cycles between charges.
- IP54 water / dust resistant and 1.5M shock resistant.
- Supports both wire (RS232 and USB ports)

GoDEX

Specification

MX20

Mobile Printer

Model	MX20
Print Method	Direct Thermal
Resolution	203 dpi (8 dots/mm)
Print Speed	Up to 4 IPS (101.6 mm/s)
Print Width	1.89" (48 mm)
Print Length	45" (~1142 mm)
Processor	32 Bit RISC CPU
Memory Flash	128 MB Flash (60 MB for user storage)
SDRAM	32 MB
Sensor Type	Gap sensor , Fixed transmissive sensor , Fixed reflective sensor
Media Types	Direct Thermal receipt, anti-UV receipt, gap label, center alignment Inter-label gap size from 2 mm to 4 mm. 3 mm preferred
Width	2.28" (59 mm) fixed
Thickness	Min 0.0508 mm, Max 0.165 mm
Media roll Diameter	Max. 1.57" (40 mm)
Printer Language	GPOS Emulations or EZPL / GZPL / GEPL / GDPL Emulations
Software Label Design Software	GoLabel (for EZPL only) , GoApp (Andriod),GoApp (iOS)
Driver	Vista, Windows 7, Windows 8 & 8.1, Windows 10, Windows Server 2008 R2, 2012, 2012 R2, 2016, 2019, MAC, Linux
SDK	Win CE, .NET, Windows Vista, Windows 7, Windows 8 & 8.1, Windows 10, Android, Mac, iOS
Resident Fonts Bitmap Fonts	6, 8, 10, 12, 14, 18, 24, 30, 16x26 and OCR A & B. 0°, 90°, 180°, 270° rotatable
TTF Fonts	TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable
Download Fonts Bitmap Fonts	90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable
Asian Fonts	16x16, 24x24, Traditional Chinese (BIG-5), Simplified Chinese (GB2312), Japanese (S - JIS), Korean (KS - X1001)
TTF Fonts	90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions
Barcodes 1-D Bar codes	TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable China Postal Code, Codabar, Code 11, Code 32,Code 39, Code 93, Code 128 (subset A, B, C), EAN-8/EAN-13 (with 2 & 5 digits extension), EAN 128, FIM, German Post Code, GS1 DataBar, HIBC, Industrial 2 of 5 , Interleaved 2-of-5 (1 2 of 5), Interleaved 2-of-5 with Shipping Bearer Bars, ISBT-128, ITF 14, Japanese Postnet, Logmars, MSI, Postnet, Plessey, Planet 11 & 13 digit, RPS 128, Standard 2 of 5, Telepen, Matrix 2 of 5, UPC-A/UPC-E (with 2 or 5 digit extension), UCC/EAN-128 K-Mart and Random Weight
2-D Bar codes	Aztec code, Code 49,Codablock F , Datamatrix code, MaxiCode, Micro PDF417, Micro QR code, PDF417,QR code, TLC 39, GS1 Composite
Code Pages	CODEPAGE 437, 850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869, 737 WINDOWS 1250, 1251, 1252, 1253, 1254, 1255, 1257 Unicode UTF8 · UTF16BE · UTF16LE
Graphics	Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software
Interfaces	RS232 + USB 2.0 port, mini-B type connector Bluetooth 2.1 + EDR
Control Panel	4 dual color LEDs for Power, Battery, Communication, Error status indication. 3 buttons for Power, Feed and BT functions
Power Adapter	Switching power supply I/P: 100 / 240 V AC, 50 / 60 Hz, DC 9 V / 2.2 A
Battery	Rechargeable DC 7.4 V Lithium-ion battery, 1150 mAH or higher capacitance
Environment Operation Temperature	14 °F to 122 °F (-10°C to 50°C)
Storage Temperature	-4 °F to 140 °F (-20°C to 60°C)
Humidity Operation	10 – 90 %, non - condensing.
Storage	10 – 90 %, non - condensing.
IP Rating	Intrusion Protection, IP42 requirement for case design, IP54 for protective case
Drop Level	1.5 meter height
Agency Approvals	CE EMC, FCC part 15B class B, FCC Part 15C,SRRC, NCC, CB, UL, cUL
Dimension Height	2.0" (51 mm)
Width	3.3" (84 mm)
Length	5.1" (129.55 mm)
Weight	0.72 lbs (325 g), with battery
Options & Accessories	Switching power supply USB cable RS-232 cable Li-ion battery 4-bay battery charger station Car charger adapter Protective case

**Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

Minimum print height and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. Godex is pleased to test non-standard materials for minimum print height and maximum print speed capability.

Applications

Applications for Labels & Barcodes

MX20 support label & barcode printings Anywhere and Anytime.



Warehouses, Logistic & Transportation

Cross Docking, inventory management, receiving / shipping, work - in - process tracking, or related industrial applications.

Retail

Content labels, receipts for registered mails, invoices & receipts, postage labels, etc.

Parking Management

Parking receipt, parking ticket, and so on.


GoDEX

LABEL DESIGN SOFTWARE

GoLabel Software / User Friendly

GoLabel is based on a WYSIWYG (what you see is what you get) user interface, makes everything so easy for you to create and print barcode labels. GoLabel is the first - choice label design software that you can't miss it!

Go visit www.godexintl.com and download GoLabel to experience it!

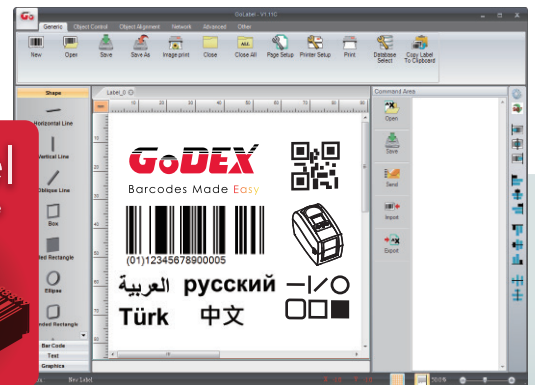


GoDEX

RIBBONS

High quality original GoDEX thermal transfer ribbons

GoDEX offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax / Resin
- Resin
- Near Edge

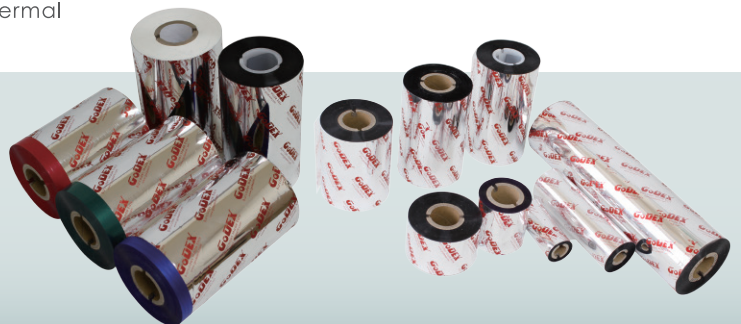

GoDEX
www.godexintl.com

Godex International
(Headquarters)
Telephone : +886 2 2225 8580
Contact us : infoGT@godexintl.com

Godex Americas
Telephone : +1 805 987 5100
Contact us : infoGA@godexintl.com

Godex China
Telephone : +86 21 56651313
Contact us : infoGC@godexintl.com

Godex Europe
Telephone : +49 2195 59599 0
Contact us : infoGE@godexintl.com