

OCR640e Desktop Full-page ID Document Reader

Fast, accurate, reliable passport, ePassport and ID card reader with optional 1D/2D barcode reader

Description

The OCR640e Desktop is a full-page multi-illumination ePassport reader. It captures ultraviolet and infrared images, as well the full page of a passport in colour.

In a simultaneous single action the reader also decodes the machine readable zone (MRZ) and processes RFID data – including the holder's image – from the chip.

The OCR640e automatically detects when a document with machine readable data has been presented. Additionally, it is able to compensate for out-of-position MRZ data, so that the advanced recognition engine reliably provides highly accurate and very fast document reading capability, allowing large volumes of documents and smart cards to be processed quickly and efficiently.

The unit features blue, amber, green and red LED lights to keep the user informed of status from ready to scan, through to processing and successful scan; or to indicate that there is an issue with the document. The unit can also be programmed to provide audible feedback to confirm a successful read, signal premature removal of a document and flag a variety of data details.

The OCR640e has a compact design, is robust and rugged. Its quality-assured manufacture ensures years of heavy-duty, frontline use.



Photograph

OCR Viz

1D & 2D barcodes

MRZ

The OCR640e reads a variety of identity documents




Features

- Full-page MRZ, image and chip read in a single action
- Full-page image capture in colour, IR greyscale & UV
- Reads a wide variety of OCR data, including all passports, ePassports, ID cards and visas conforming to ICAO 9303, and ISO18013
- Option to read 1D/2D barcodes from smartphones, tablets and paper-based documents
- Fast, accurate and reliable
- Audio 'beep' to confirm successful data capture and error
- Robust and compact, small footprint design
- 4mm toughened glass face.

Applications

- Customer identity verification, including age verification and anti-money laundering identity checks
- Airport passenger data capture
- Border control and immigration
- Hotels, car rental, casinos (Know Your Customer)

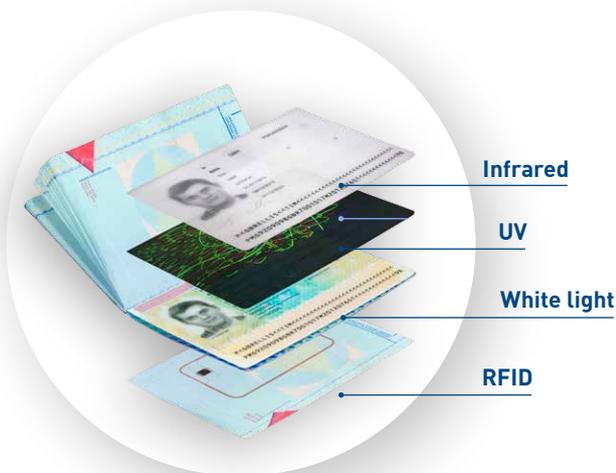

The OCR640e captures full-page colour, UV & IR images and the RFID data of passports and other identity documents



ASKA

ul. Wędkarska 2A/B1, 04-869 Warszawa
tel. 22 4985908/9, fax 22 6177020

e-mail: ask@aska.com.pl www.kodykreskowe.com

Example of device capabilities

PASSPORT INFORMATION

Last name	ELLIS
First name	TIM
Date of birth	01/01/1970
Expiry date	08/12/2020
Nationality	CANADIAN
Document No.	PMG920909


Photo


Fingerprint


Colour


Ultraviolet (UV)


Infrared (IR)


DOCUMENT AUTHENTICATION

 Genuine Document


eMRTD SECURITY

-  Basic Access Control
-  Chip Authentication
-  Active Authentication
-  Passive Authentication
-  Terminal Authentication
-  Extended Access Control
-  Supplemental Access Control

Hardware dimensions

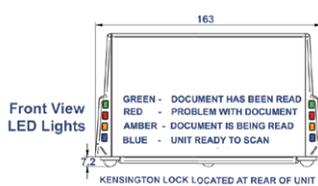

Shroud options

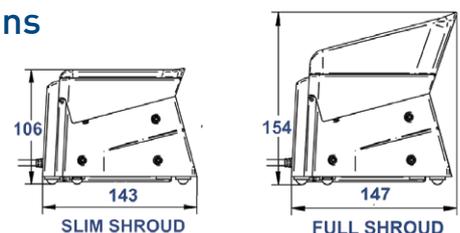

OCR640e Desktop ePassport and eID card reader specifications

MRZ reading

Standard OCR fonts: OCR-B

Machine readable passports (MRP): 2 lines of 44 characters to ICAO 9303

Machine readable visas (MRV): 2 lines of 44 characters, 2 lines of 36 characters to ICAO 9303

Travel documents: 2 lines of 36 characters, 3 lines of 30 characters

Imaging

Glass Platen: 4mm Toughened Conturan

Active scan area: 135mm x 90mm

Full-page: JPG, BMP, TIFF, PNG

Illumination sources: visible/white, IR, UV LED's

Resolution: 400 DPI

Contactless RFID reading (variant)

Interoperability: ICAO DOC 9303, LDS1.7, ISO18013 (Driving Licence), PA, AA, BAC, EAC v1.11 (CA, TA), EAC v2.0x (PACE v2, ICAO SAC, CA v2, TA v2)

Operating frequency: 13.56 MHz

Supported documents: ISO 14443 type A & B auto-detecting; secure and high-speed data transmission; Mifare memory card support (Mifare ultralight, 1K, 4K cards)

Application interface: PC/SC compliant device

Barcode reading (option)

Linear (1D): EAN / UPC, Code 2 of 5, Interleaved 2 of 5, IATA 2 of 5, Code 39, Code 128 *

2D: IATA resolution 792, PDF417, Aztec, DataMatrix and QR codes *

* Full list of supported barcodes available upon request

Mechanical

Size: 163W x 147D x 154H mm

Body: Dark grey ABS

Glass: Magic BS EN60068-2-75 & IEC 62262:2002, rated to 6.375J impact

Weight: 850g

Security: Kensington® security slot

Power supply

+24 VDC via DC jack

Communications & host

Communication: USB 2.0 high speed

Host: OS Windows XP/7/8, Win 32/64 bit; Pentium-4 3GHz and 2GB RAM minimum

Environmental

Temperature: Operating 0 °C to 50 °C
Storage: 0 °C to 60 °C

Humidity: 0 to 95% non-condensing

Approvals:

FCC Part 15C Class A ; CE EMC Class A, CE Low Voltage Directive; IEC60825-1, LED Safety: Class 1

Variant

OCR640n Desktop: As OCR640e but *without RFID functionality*

Option

Barcode Reading: 1D/2D

Slim Shroud: Low profile, open-faced

Ver: 1.4 January 2015



ASKA

ul. Wędkarska 2A/B1, 04-869 Warszawa

tel. 22 4985908/9, fax 22 6177020

e-mail: ask@aska.com.pl www.kodykreskowe.com